

WIMAX
WIFI
GSM
3G

CORNET

Electrosmog

RF field strength power meter

100MHz-6GHz (useful up to 8GHz)


(Dual mode with LF Gauss meter function)

ED75

Unique, handy tool for your personal Electromagnetic wave exposure detection and level measurement. Highly sensitive and Accurate indicators for your defense on both RF and LF radiation pollutions.

Applications

- Electromagnetic field strength measurement both low frequency and high frequency
- Mobile phone base station radiation power Density safety measurement
- Telecommunications(CW,TDMA,GSM,DECT)
- AC power line, Transformer radiation
- RF power measurement for radio transmitters
- Wireless LAN (Wi-Fi) detection, installations
- Spy camera, wireless bug finder
- 5.8GHz wireless, Utilities smart AC meter
- Cellular/cordless phone radiation safety level
- Microwave oven leakage detection
- Electric and magnetic field measurement
- Personal living environment EMF safety

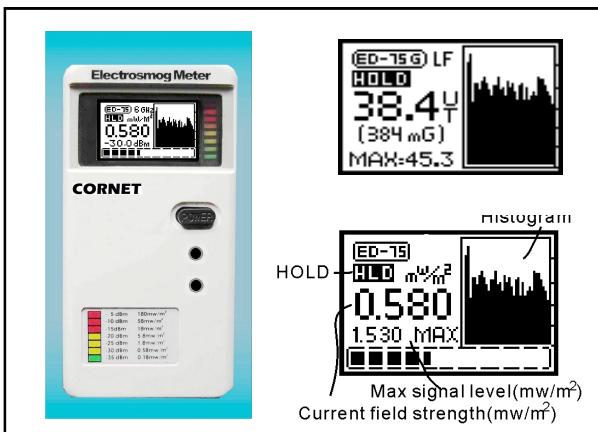

Features

- Dual operation mode: RF power meter mode and LF Gauss meter mode
- Frequency range: 100MHz - 6GHz (RF meter), (useful up to 8GHz)
50Hz- 10KHz (Gauss meter)
- Super Wide dynamic range: 60dB(RF meter)
- High sensitivity: -55dBm to 0dBm (RF meter), 1mG - 500 mG (Gauss meter)
- Peak power density measurement 1.5uW/m² to 0.58W/m², (25mV/m to 15V/m)
- LCD digital Histogram and bar-graphics for RF level and Gauss level display
- Max and Hold function, mW/m², V/m, dBm unit display modes
- 8 Color LED segment display for safety indication
- Analog RF(AM,FM) and High speed digital RF(GSM,TDMA,,CDMA, Wi-Fi,WiMAX)
- Both AC Magnetic field and RF Electrical field measurement
- Small, compact handheld design, 65mmx130mm
- Battery operated (9V DC)

CORNET
Microsystems inc.,

1400 Coleman Ave
Ste. #C28
Santa Clara, CA 95050 USA

Phone: (408) 969-0205
Fax: (408) 969-0204
E-mail: sale-support@cornetmicro.com
Web: www.cornetmicro.com